


Fiber Optic Lighting

FIBER OPTIC ILLUMINATOR - 4.3 WATT LED

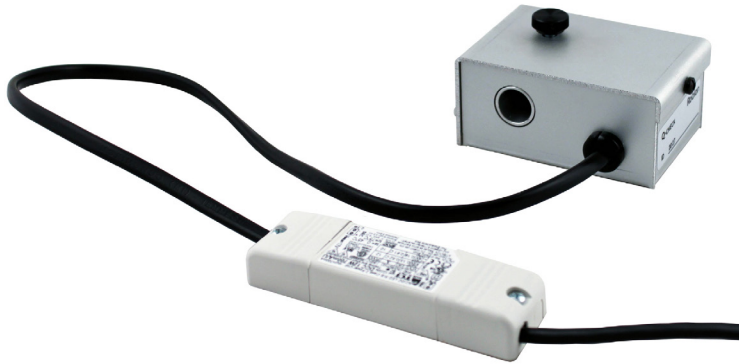


Features:

- Compact size ideal for display cases

PORT OPTIONS	Available with 9mm port to hold up to 140 - 0.75mm fibers at standard brightness.
CONTROL FEATURES	Available in White Light only.
LAMP	Lumileds LUXEONS S LED
ELECTRICAL	Electrical transformer; 120-240v/50-60Hz; 6' attached power cord with connector; 0.6amps. continuous load at 120 volts
ENCLOSURE	IP20 rating for dry or damp operating environment; anodized aluminum housing; weight 0.9 kilograms (2 lbs.)
FIBER CAPACITY	9mm port: 140 - 0.75mm; accepts stranded PMMA/glass or large core fiber
HARNESS	9mm
MOUNTING AND VENTILATION	3" all sides recommended clearance; 0°C min/+40°C
LISTINGS	ETL, CE, and cUL listed
DIMMING	None

MOUNTING GUIDE


On wall/vertical

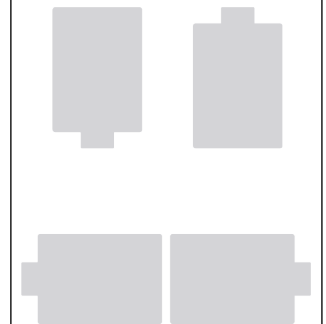

Horizontal



AIRFLOW GUIDE

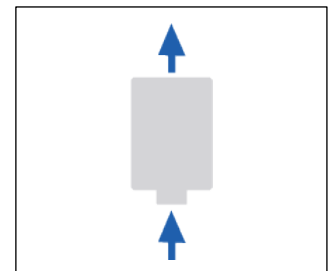

Fiber Optic Lighting

FIBER OPTIC ILLUMINATOR - 4.3 WATT LED

