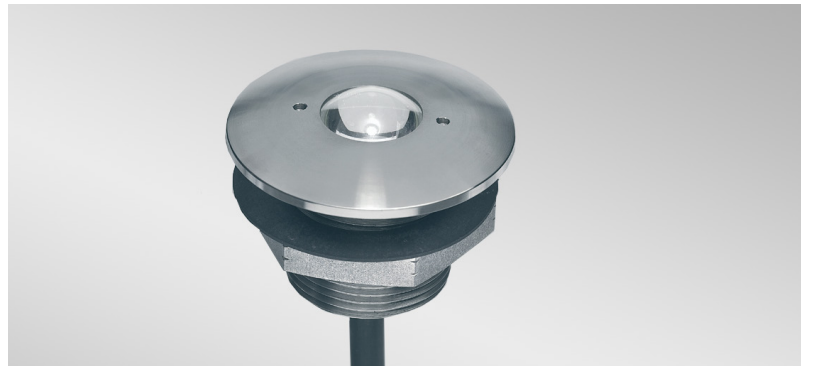


ATLANTIS SERIES

Underwater Fixtures for Pools and Fountains



- Marine grade 316 stainless steel
- Fully submersible to 30 feet
- Fixed flood or spot lenses
- Rough-in kit for poured concrete
- Full photometrics using VLT Lux Calculator
- Underwater rated for pools and fountains





Atlantis Series - Underwater Fixtures for Pools and Fountains

35mm Underwater Fixtures

Specifications		CAT. NO. AT - ID - FX - 35 - 12 - SS
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 35mm</p> <p>Lens Type: 12mm Domed Glass Lens</p> <p>Focus: Fixed</p> <p>Beam Angle: 10° - 36° (7° - 27° in water)</p> <p>Mounting: Semi-Recessed, Conduit or Plate</p> <p>Primary Material: Stainless Steel</p> <p>IP Rating: IP68 to 10m Depth</p>	<p>Description: Atlantis Series (Roblon Aquarius 35 Medium) fixedfocus underwater fixture with 12mm domed glass lens and 35mm outer diameter; 10° - 36° beam angle (fiber size dependent); underwater rated (IP68 to 10m depth); accepts PMMA or glass fiber up to 6.0mm; mounts into conduit or onto metal plate (nut provided); electro-polish finish.</p> <p>Finishes Available: Stainless Steel - Marine Grade 316</p>
Specifications		CAT. NO. AT - OD - FX - 35 - PG - SS
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Outdoor Ferrule</p> <p>Fixture Size: 35mm</p> <p>Lens Type: Plain Flat Glass Lens</p> <p>Focus: Fixed</p> <p>Beam Angle: 54° (38° in water)</p> <p>Mounting: Semi-Recessed, Conduit or Plate</p> <p>Primary Material: Stainless Steel</p> <p>IP Rating: IP68 to 10m Depth</p>	<p>Description: Atlantis Series (Roblon Aquarius 35 Wide) fixed-focus underwater fixture with plain flat glass lens and 35mm outer diameter; 54° beam angle; underwater rated (IP68 to 10m depth); accepts PMMA or glass fiber up to 6.0mm; mounts into conduit or onto metal plate (nut provided); electro-polish finish.</p> <p>Finishes Available: Stainless Steel - Marine Grade 316</p>
Specifications		CAT. NO. AT - AC - MK - 35
	<p>Accessory: Mounting Kit</p> <p>Fixture Size: 35mm</p> <p>Dimensions: ø33mm x 65mm [ø 1.30 x 2.56]</p> <p>Conduit Size: 1/2"</p>	<p>Description: Atlantis Series rough-in kit for poured concrete installations; for use with 35mm fixture; connects to 1/2" Schedule 40 conduit.</p>
FIXTURE SIZE:		CAT. NO. AT - AC - TK - 35
	<p>Accessory: Tool Kit</p> <p>Fixture Size: 35mm</p>	<p>Description: Atlantis Series tool kit for installation of fixture; for use with 35mm fixture.</p>

Atlantis Series - Underwater Fixtures for Pools and Fountains

70mm Underwater Fixtures

Specifications		CAT. NO. AT - ID - FX - 70 - 26 - SS
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 3.0mm, 4.5mm, 6.0mm, 8.0mm, 9.0mm, 10.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 70mm</p> <p>Lens Type: 26mm Domed Glass Lens</p> <p>Focus: Fixed</p> <p>Beam Angle: 7° - 33° (5° - 24° in water)</p> <p>Mounting: Semi-Recessed, Conduit or Plate</p> <p>Primary Material: Stainless Steel</p> <p>IP Rating: IP68 to 10m Depth</p>	<p>Description: Atlantis Series (Roblon Aquarius 70 Focus) fixed-focus underwater fixture with 26mm domed glass lens and 70mm outer diameter; 7° - 33° beam angle (fiber size dependent); under-water rated (IP68 to 10m depth); accepts PMMA or glass fiber up to 10.0mm; mounts into conduit or onto metal plate (nut provided); electro-polish finish.</p> <p>Finishes Available: Stainless Steel - Marine Grade 316</p>
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 3.0mm, 4.5mm, 6.0mm, 8.0mm, 9.0mm, 10.0mm</p> <p>Ferrule Type: Outdoor Ferrule</p> <p>Fixture Size: 70mm</p> <p>Lens Type: Plain Flat Glass Lens</p> <p>Focus: Fixed</p> <p>Beam Angle: 54° (38° in water)</p> <p>Mounting: Semi-Recessed, Conduit or Plate</p> <p>Primary Material: Stainless Steel</p> <p>IP Rating: IP68 to 10m Depth</p>	<p>Description: Atlantis Series (Roblon Aquarius 70 Wide) fixed-focus underwater fixture with plain flat glass lens and 70mm outer diameter; 54° beam angle; underwater rated (IP68 to 10m depth); accepts PMMA or glass fiber up to 10.0mm; mounts into conduit or onto metal plate (nut provided); electro-polish finish.</p> <p>Finishes Available: Stainless Steel - Marine Grade 316</p>
	<p>Accessory: Mounting Kit</p> <p>Fixture Size: 70mm</p> <p>Dimensions: ø 68mm x 70mm [ø2.68 x 2.76]</p> <p>Conduit Size: 1" or 1.5"</p>	<p>Description: Atlantis Series rough-in kit for poured concrete installations; for use with 70mm fixture; connects to 1" or 1.5" Schedule 40 conduit.</p>
	<p>Accessory: Tool Kit</p> <p>Fixture Size: 70mm</p>	<p>Description: Atlantis Series tool kit for installation of fixture; for use with 70mm fixture.</p>