







MOUNTING OPTIONS


All EssentialLEDs® linear products are ETL listed for both surface and recessed mount applications. ● Options marked by orange dots are factory-installed and must be specified on product configurator.

FIXED METAL CLIP - MLR, ML1	SPECIFICATIONS	CAT. NO. ELL - AC - MLR - MC
	<p>Dimensions: 0.134" x 0.384" [3.40mm x 9.760mm] Material: 301 Stainless Steel</p>	<p>Description: Fixed Metal Clip for mounting Mini LightRun extrusion. Screws to mounting surface with screw, provided. Fixture snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>
	<p>Dimensions: 0.34" x 0.42" [8.64mm x 10.66mm] Material: 301 Stainless Steel</p>	<p>Description: Fixed Metal Clip for mounting 1S square fixture with No Lens. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>
	<p>Dimensions: 0.43" x 0.59" [10.9mm x 15.0mm] Material: 301 Stainless Steel ¹When 1S is specified with Slide-On Lens</p>	<p>Description: Fixed Metal Clip for mounting 8CL, 8FL and 1S square fixture when SLC lens is used. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>
	<p>Dimensions: 0.98" x 0.63" [24.89mm x 16.00mm] Material: 301 Stainless Steel</p>	<p>Description: Fixed Metal Clip for mounting extra depth 4SL square fixture. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>
	<p>Dimensions: .285" x .415" [7.24mm x 10.54mm] Material: 301 Stainless Steel</p>	<p>Description: Fixed Metal Clip for mounting 7SL square fixture. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>
	<p>Dimensions: .285" x .550" [7.24mm x 13.97mm] Material: 301 Stainless Steel</p>	<p>Description: Fixed Metal Clip for mounting 8SL square fixture. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).</p>

FIXED METAL CLIP - 9SL

SPECIFICATIONS

CAT. NO. ELL - AC - 9SL - MC




Dimensions: .613" x 1.06" [15.57mm x 26.92mm]
Material: 301 Stainless Steel

Description: Fixed Metal Clip for mounting 9SL square fixture. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).

ADJUSTABLE METAL CLIP - 1S

SPECIFICATIONS

CAT. NO. ELL - AC - 1S - AMC




Dimensions: 0.33" x 0.71" [8.38mm x 18.03mm]
Material: 301 Stainless Steel

Description: Adjustable Metal Clip for mounting 1S square extrusion with No Lens. Offset screw plate allows flush mount or one-time adjustment to desired angle. Allow 1 per 12" of extrusion (min. 2 per fixture).

ADJUSTABLE METAL CLIP - 7SL

SPECIFICATIONS

CAT. NO. ELL - AC - 7S - AMC




Dimensions: 0.33" x 0.71" [8.38mm x 18.03mm]
Material: 301 Stainless Steel

Description: Fixed Metal Clip for mounting 7SL square fixture. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).

ADJUSTABLE METAL CLIP - 8SL, 8CL, 8FL & 1S¹

SPECIFICATIONS

CAT. NO. ELL - AC - 2SL - AMC




Dimensions: 0.43" x 0.84" [10.92mm x 21.34mm]
Material: 301 Stainless Steel
¹ When 1S is specified with Slide-On Lens

Description: Adjustable Metal Clip for mounting 8SL, 8CL, 8FL and 1S square extrusion with SLC lens. Offset screw plate allows flush mount or one-time adjustment to desired angle. Allow 1 per 12" of extrusion (min. 2 per fixture).

ADJUSTABLE METAL CLIP - 9SL

SPECIFICATIONS

CAT. NO. ELL - AC - 3SL - AMC




Dimensions: 1.12" x 1.31" [28.45mm x 33.27mm]
Material: 301 Stainless Steel

Description: Adjustable Metal Clip for mounting 9SL square extrusions. Offset screw plate allows flush mount or one-time adjustment to desired angle. Allow 1 per 12" of extrusion (min. 2 per fixture).

ADJUSTABLE METAL CLIP - 4SL

SPECIFICATIONS


CAT. NO. ELL - AC - 4SL - AMC



Dimensions: 0.98" x 0.94" [24.89mm x 23.87mm]
Material: 01 Stainless Steel

Description: Adjustable Metal Clip for mounting extra depth (4SL) square extrusion. Offset screw plate allows flush mount or one-time adjustment to desired angle. Allow 1 per 12" of extrusion (min. 2 per fixture).


ADJUSTABLE METAL CLIPS FOR 1S, 4SL, 7SL, 8SL, 8CL AND 9SL EXTRUSIONS ALLOW FIXTURES TO BE ATTACHED IN A VARIETY OF MOUNTING SURFACE POSITIONS AND ALLOW ONE-TIME ADJUSTMENT TO DESIRED ANGLE. SEE EXAMPLES BELOW. FIRST PRESS FIXTURE INTO CLIPS, THEN GENTLY BEND CLIPS TO DESIRED ANGLE. NOT INTENDED FOR REPEATED ADJUSTMENTS.

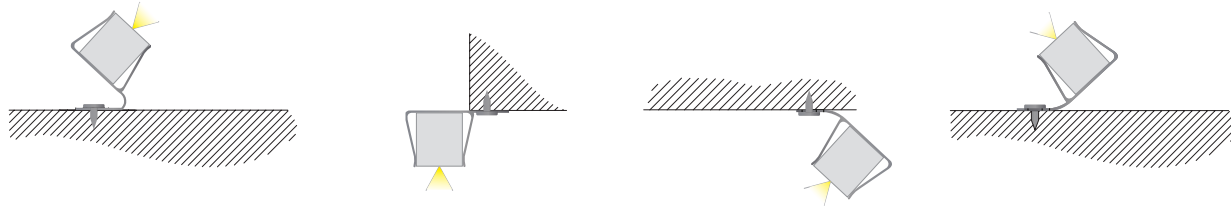

ADJUSTABLE BRACKET - 1S, 4SL, 7SL, 8SL, 8CL, 9SL

SPECIFICATIONS

CAT. NO. ELL-AC-S123-AB

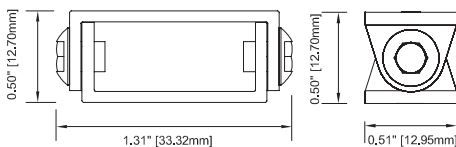


Dimensions: 1.31" x 0.51" x 0.50"
[33.32mm x 12.95mm x 12.7mm]
Material: 304 Stainless Steel

Description: Adjustable Metal Bracket for use with Fixed Metal Mounting Clip (one bracket per clip, ordered separately). Allows repeated 30° angle adjustability of 1S, 4SL, 7SL, 8SL, 8CL or 9SL square fixtures. Screws to mounting surface with screw, provided. Raises fixture 3/8" (9.52mm) off mounting surface. Allow 1 per 12" of extrusion (min. 2 per fixture).

1EL MOUNTING CLIP

SPECIFICATIONS

CAT. NO. ELL - AC-1EL - MC




Dimensions: 1.59" [40.36mm] x 0.22" [5.84mm]
Material: Stainless Steel

Description: Fixed Metal Clip for mounting small (1EL) demi-ellipse extrusion. Countersunk screw-holes allows fixture to mount flush to surface (#4 screws provided). Fixture extrusion snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).

1EL- END CAP/FLANGE

SPECIFICATIONS

CAT. NO. ELL - AC - 1EL - FEC -



Dimensions: 1.50" [38.10mm] x 0.433" [11.0mm]
Material: Aluminum


Description: Flange End Cap for self-mounting 1EL fixture. Factory installed – must be specified on product configurator. Flange on both ends adds 0.866" [22.0mm] to overall length of fixture. Screws to mounting surface with #4 screw, provided. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

AL
BL
BZ
WH

PLASTIC CLIP - 1R, 2RL, 3RL

SPECIFICATIONS

CAT. NO. ELL - AC -

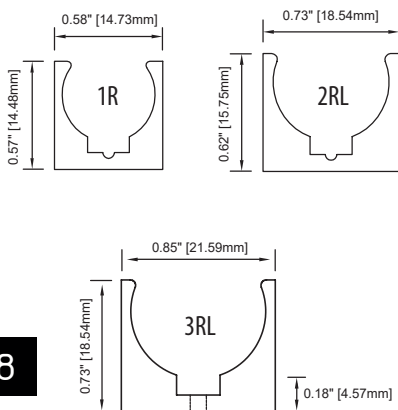

1R Dimensions: 0.58" x 0.57" [14.73mm x 14.48mm]
2RL Dimensions: 0.73" x 0.62" [18.54mm x 15.75mm]
3RL Dimensions: 0.85" x 0.73" [21.59mm x 18.54mm]
Material: ABS Plastic

Description: Plastic Clip for mounting round extrusion. Screws to mounting surface with screw, provided. Fixture extrusion snaps into clip. Raises fixture 0.13" (3.30mm) for 1R and 2RL, 0.18" (4.57mm) for 3RL. Allows 30° rotation. Allow 1 per 12" of extrusion (min. 2 per fixture).


1R
2RL
3RL

All EssentialLEDs® linear products are UL listed for both surface and recessed mount applications. ● Options marked by orange dots are factory installed and must be specified on fixture configurator.

LOCKING CLIP - 1R, 2RL, 3RL

SPECIFICATIONS

CAT. NO.	ELL - AC -	- LC -
	1R 2RL 3RL	AL BL BZ WH

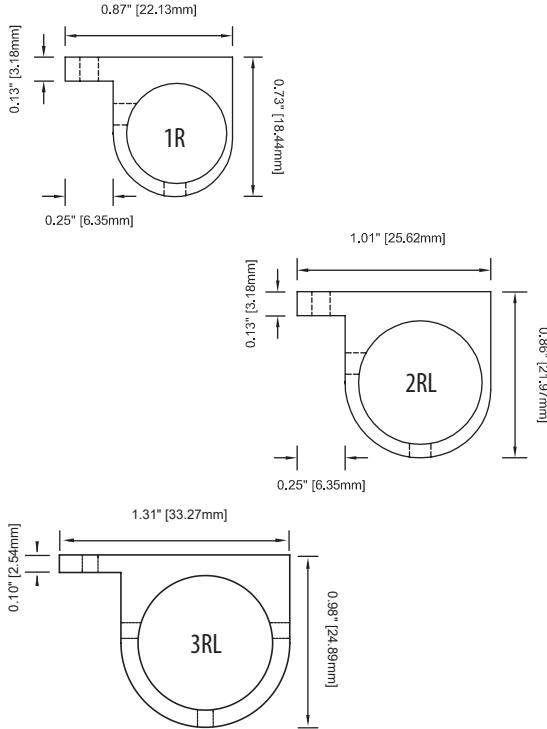


1R Dimensions: 0.87" x 0.73" [22.13mm x 18.44mm]
 2RL Dimensions: 1.01" x 0.86" [25.62mm x 21.97mm]
 3RL Dimensions: 1.31" x 0.98" [33.27mm x 24.89mm]
 Material: Aluminum
 Finish: Silver (AL), Black (BL), Bronze (BZ)
 Anodized; White (WH) Powder Coated

Description: Locking Adjustable Clip for mounting round extrusion. Screws to mounting surface with screw, provided. Raises fixture 0.13" (3.18mm). Full rotation with locking set screw. Allow 2 per fixture (1 at each end) with 48" [1279.2mm] max span between. Add Plastic Mounting Clips in between for longer spans. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

SELF-ADHESIVE LOCKING CLIP - 1R, 2RL, 3RL

SPECIFICATIONS

CAT. NO.	ELL - AC -	- SALC -
	1R 2RL 3RL	AL BL BZ WH

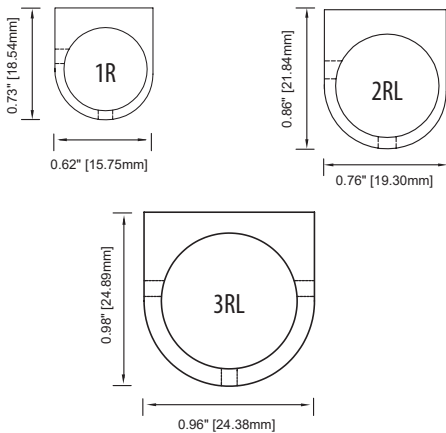


1R Dimensions: 0.62" x 0.73" [15.75mm x 18.54mm]
 2RL Dimensions: 0.76" x 0.86" [19.30mm x 21.84mm]
 3RL Dimensions: 0.96" x 0.98" [24.38mm x 24.89mm]
 Material: Aluminum
 Finish: Silver (AL), Black (BL), Bronze (BZ)
 Anodized; White (WH) Powder Coated

Description: Locking Adjustable Clip for mounting small (1R) round extrusion. VHB tape provides self-adhesive attachment to any surface. Raises fixture 0.13" (3.18mm). Full rotation with locking set screw. Allow 2 per fixture (1 at each end) with 48" [1279.2mm] max span between. Add Plastic Mounting Clips in between for longer spans. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

METAL ROUND CLIP - 1R, 2RL, 3RL

SPECIFICATIONS

CAT. NO.	ELL - AC -	- MRC
	1R 2RL 3RL	





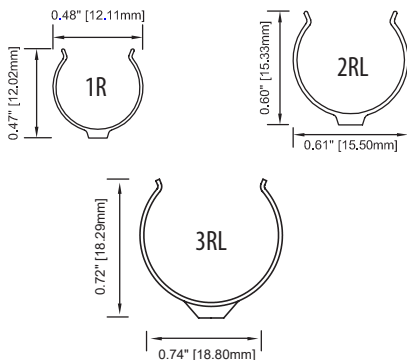


1R Dimensions: 0.48" x 0.47" [12.11mm x 12.02mm]
 2RL Dimensions: 0.61" x 0.60" [15.50mm x 15.33mm]
 3RL Dimensions: 0.74" x 0.72" [18.80mm x 18.29mm]
 Material: 301 Stainless Steel
 Finish: Polished Nickel

Description: Cylindrical Metal Clip for mounting round extrusion. Countersunk screw-holes allows fixture to mount flush to surface (#4 screw provided). Fixture extrusion snaps into clip. Allows 60° rotation. Allow 1 per 20" of extrusion (min. 2 per fixture).

MOUNTING OPTIONS


All EssentialLEDs® linear products are UL listed for both surface and recessed mount applications. ● Options marked by orange dots are factory-installed and must be specified on product configurator.

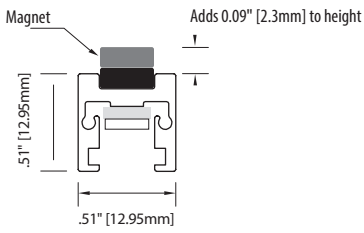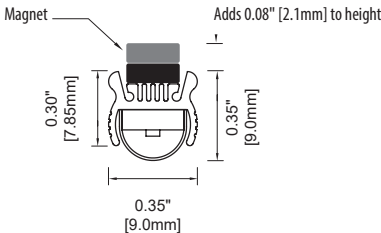MAGNETIC MOUNT - 4SL, 8SL, 8CL, 8FL, 9SL, LIGHTRUN	SPECIFICATIONS	CAT. NO.	ELL-AC-	-MAG
	<p>Dimensions: Adds 0.09" [2.3mm] to height</p> <p>Material: Sintered Neodymium-Iron-Boron</p> <p>Plating: (NdFeB)Ni-Cu--Ni (Nickel)</p>			<div style="border: 1px solid black; padding: 2px;"> 4SL 8SL 8CL 8FL 9SL LR </div>
	<p>Dimensions: Adds 0.08" [2.1mm] to height</p> <p>Material: Sintered Neodymium-Iron-Boron</p> <p>Plating: (NdFeB)Ni-Cu--Ni (Nickel)</p>			<div style="border: 1px solid black; padding: 2px;"> ML1 7SL MLR </div>
STEEL MOUNTING PLATE	SPECIFICATIONS	CAT. NO.	ELL- AC-	MAG - PLT
	<p>Dimensions: 2" x 0.355" x 0.036" [50.8mm x 9.01mm x 0.91mm]</p> <p>Material: Steel</p>			<p>● Description: Steel Mounting Plate enables magnetic mounting of 4SL, 7SL, 8SL, 8CL, 9SL, LightRun or Mini LightRun fixtures on non-ferrous surfaces. Use one per magnet.</p>
BUSHING -1R	SPECIFICATIONS	CAT. NO.	ELL - AC - 1RL - BU -	
	<p>Dimensions: 1.50" x 1.00" [38.10mm x 25.40mm]</p> <p>Material: Machined 6061 Aluminum</p> <p>Finish: Silver (AL), Black (BL) Anodized; Bronze (BZ) or White (WH) Powder</p> <p>Cutout ∅ Coated 13/16" [21mm]</p>			<div style="border: 1px solid black; padding: 2px;"> AL BL BZ WH </div>
BUSHING - 2RL	SPECIFICATIONS	CAT. NO.	ELL - AC - 2RL - BU -	
	<p>Dimensions: 1.50" x 1.13" [38.10mm x 28.58mm]</p> <p>Material: Machined 6061 Aluminum</p> <p>Finish: Silver (AL), Black (BL) Anodized; Bronze (BZ) or White (WH) Powder</p> <p>Cutout ∅: Coated 15/16" [24mm]</p>			<div style="border: 1px solid black; padding: 2px;"> AL BL BZ WH </div>

INSIDE MOUNT END CAP - 1R

SPECIFICATIONS

CAT. NO. ELL - AC - 1R - IM -



Dimensions: 0.50" x 0.69" [12.70mm x 17.44mm]
 Material: Machined 6061 Aluminum
 Finish: Silver (AL), Black (BL) Anodized;
 Bronze (BZ) or White (WH) Powder
 Coated


● **Description:** Inside Mount End Cap for mounting small (1R) round extrusion to insides of cabinetry (using #4 screws, provided). Factory installed – must be specified on product configurator (page 30). Requires 2 per fixture with 48" [1279.2mm] max span between. Tab extends 0.19" [4.74mm] beyond fixture diameter. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

AL
BL
BZ
WH

INSIDE MOUNT END CAP - 2RL

SPECIFICATIONS

CAT. NO. ELL - AC - 2RL - IM -



Dimensions: 0.63" x 0.79" [15.88mm x 20.14mm]
 Material: 6061 Aluminum
 Finish: Silver (AL), Black (BL) Anodized;
 Bronze (BZ) or White (WH) Powder
 Coated


● **Description:** Inside Mount End Cap for mounting medium (2RL) round extrusion to insides of cabinetry (using #4 screws, provided). Factory installed – must be specified on product configurator (page 31). Requires 2 per fixture with 48" [1279.2mm] max span between. Tab extends 0.17" [4.26mm] beyond fixture diameter. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

AL
BL
BZ
WH

ADJUSTABLE INSIDE MOUNT RING - 1R

SPECIFICATIONS

CAT. NO. ELL - AC - 1R - IMR -



Dimensions: 1.25" [31.75mm]
 Material: 6061 Aluminum
 Thickness: 0.19" [4.83mm]
 Finish: Silver (AL), Black (BL) Anodized;
 Bronze (BZ) or White (WH) Powder
 Coated


Description: Adjustable Inside Mount Ring for mounting small (1R) round extrusion to insides of cabinetry (using #6 FH screws, provided). Allows 60° rotation. Requires 2 per fixture with 48" [1279.2mm] max span between. 1.25" [31.75mm] diameter. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

AL
BL
BZ
WH

ADJUSTABLE INSIDE MOUNT RING - 2RL

SPECIFICATIONS

CAT. NO. ELL - AC - 2RL - IMR -



Dimensions: 1.25" [31.75mm]
 Material: 6061 Aluminum
 Thickness: 0.19" [4.83mm]
 Finish: Silver (AL), Black (BL) Anodized;
 Bronze (BZ) or White (WH) Powder
 Coated

Description: Adjustable Inside Mount Ring for mounting medium (2RL) round extrusion to insides of cabinetry (using #6 FH screws, provided). Allows 60° rotation. Requires 2 per fixture with 48" [1279.2mm] max span between. 1.25" [31.75mm] diameter. Silver (AL), Black (BL), Bronze (BZ) or White (WH) finish to match fixture.

AL
BL
BZ
WH