



## New! ML1 CHOICE MINI DESIGNER EXTRUSION - NO LENS

ML1 Choice:IP20 | Rounded extrusion for linear lighting applications. Includes selection of 3 LED Boards with EssentialLEDs Choice LEDs on a Narrow Pitch. See lumen outputs, CCTs, wattage and other variables on Choice Linear Fundamentals.

Available in Silver or Black Finishes. Photometrics vary based on CCT; see vltcorp.com for output conversion and other data specific to your fixture choices.



OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE DEVICES



AVAILABLE IN LENGTHS UP TO 95.28" [2420MM]

ELC- ML1 -


LED		CCT		Finish		Lens Options		Wire Exit		Listings & Options	
1435	288 lm/ft, 2.7 w/ft, 90+ CRI	23	2300K	AL	Silver Anodized	NL	No Lens	WE1	Default	UL	UL Listed
2435	384 lm/ft, 3.7 w/ft, 90+ CRI	27	2700K	BL	Black Anodized					CE	CE Listed (RoHS)
3435	478 lm/ft, 5.5 w/ft, 90+ CRI	30	3000°K							MAG	Magnetic Mount
		35	3500°K								
		40	4000°K								

Narrow Pitch Choice LEDs

**Fixture Length**  
See Fixture Length and Wattage Table. Choose the correct Code number for the LED board and fixture length of your choice or specify Custom Length as follows: C (12.25") C (311mm)


### Fixture Accessories

#### ELL - AC - MLR - MC



**Description:** Fixed Metal Clip for mounting ML1 extrusion. Screws to mounting surface with screw, provided. Fixture snaps into clip. Allow 1 per 12" of extrusion (min. 2 per fixture).

#### Factory Installed; See Options Above

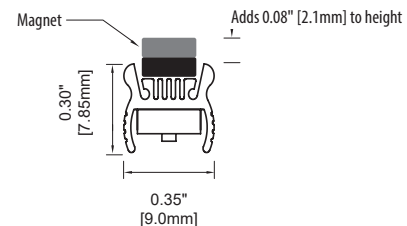

**Description:** Magnetic Mount for ML1 extrusion. Small, strong magnets recess into rear side of fixture extrusions for magnetic mounting of fixture on suitable surface. Factory installed. Adds 0.08" [2.1mm] to fixture height.