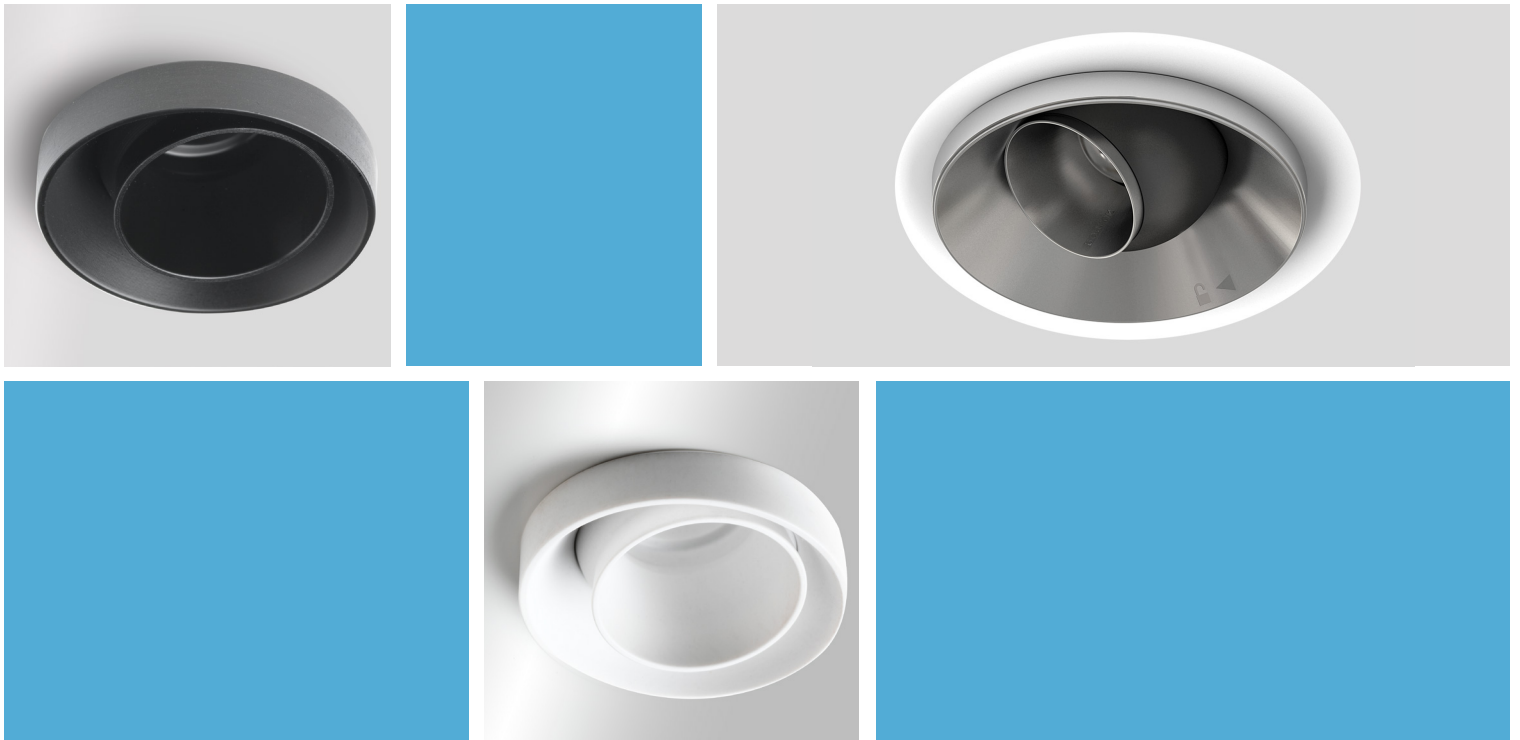


AVANT-GARDE

Adjustable Accent Fixtures

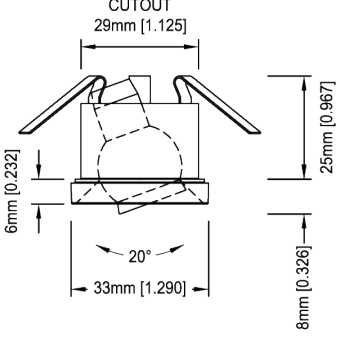
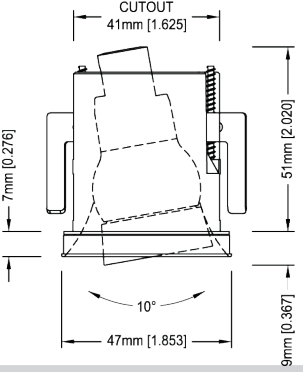
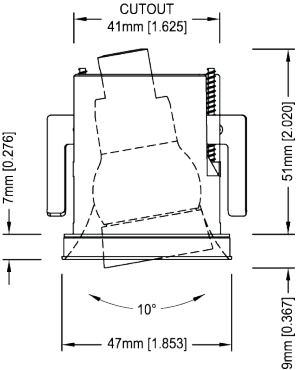


- Recessed adjustable downlights
- Precision optical design
- Multiple lens options and variable beam angles
- Tool-less locking adjustment
- Glare-free lens
- 360° rotation
- Black, white and chrome finishes
- Ideal for meticulous accent lighting for galleries and displays

Avant-Garde Series - Adjustable Accent Fixtures

Specifications		CAT. NO. AV - MC - 1 - 26 - NL -	BL WH
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm</p> <p>Ferrule Type: Micro Ferrule</p> <p>Fixture Size: 26mm</p> <p>Lens Type: No Lens</p> <p>Beam Angle: 54°</p> <p>Tilt Angle: up to 10°</p> <p>Mounting: Recessed, Tension Clip</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 1-10 Wide) adjustable-focus accent fixture with no lens and 26mm outer diameter; wide 54° beam angle; for use with 2.0mm PMMA or glass fiber; up to 10° tilt angle and 360° rotation; recessed mounting with tension clips.</p> <p>Finishes Available: Black (BL), White (WH)</p>	
Specifications		CAT. NO. AV - ID - 1 - 26 - 12N -	BL WH
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm</p> <p>Ferrule Type: Micro Ferrule</p> <p>Fixture Size: 26mm</p> <p>Lens Type: 12mm Domed Glass Lens</p> <p>Beam Angle: 11° - 30°</p> <p>Tilt Angle: up to 10°</p> <p>Mounting: Recessed, Tension Clip</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 1-10 Focus) adjustable-focus accent fixture with 12mm domed glass lens and 26mm outer diameter; narrow 11° - 30° beam angle; for use with 2.0mm PMMA or glass fiber; up to 10° tilt angle and 360° rotation; recessed mounting with tension clips.</p> <p>Finishes Available: Black (BL), White (WH)</p>	
Specifications		CAT. NO. AV - ID - 2 - 33 - NL -	BL WH
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 33mm</p> <p>Lens Type: No Lens</p> <p>Beam Angle: 54°</p> <p>Tilt Angle: up to 20°</p> <p>Mounting: Recessed, Tension Clip</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-20 Medium) adjustable-focus accent fixture with 12mm domed glass lens and 33mm outer diameter; medium 30° beam angle; accepts PMMA or glass fiber up to 6.0mm; up to 20° tilt angle and 360° rotation; recessed mounting with tension clips.</p> <p>Finishes Available: Black (BL), White (WH)</p>	

Avant-Garde Series - Adjustable Accent Fixtures

Specifications		CAT. NO. AV - MC - 2 - 33 - 12M -
 <p>CUTOUT 29mm [1.125]</p> <p>6mm [0.232]</p> <p>25mm [0.967]</p> <p>33mm [1.290]</p> <p>20°</p> <p>8mm [0.326]</p>	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 33mm</p> <p>Lens Type: 12mm Domed Glass Lens</p> <p>Beam Angle: 30°</p> <p>Tilt Angle: up to 20°</p> <p>Mounting: Recessed, Tension Clip</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-20 Medium) adjustable-focus accent fixture with 12mm domed glass lens and 33mm outer diameter; medium 30° beam angle; accepts PMMA or glass fiber up to 6.0mm; up to 20° tilt angle and 360° rotation; recessed mounting with tension clips.</p> <p>Finishes Available: Black (BL), White (WH)</p>
 <p>CUTOUT 41mm [1.625]</p> <p>7mm [0.276]</p> <p>51mm [2.020]</p> <p>47mm [1.853]</p> <p>10°</p> <p>9mm [0.367]</p>	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 48mm</p> <p>Lens Type: No Lens</p> <p>Beam Angle: 154°</p> <p>Tilt Angle: up to 10°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-10 Wide) adjustable-focus accent fixture with no lens and 48mm outer diameter; wide 54° beam angle; accepts PMMA or glass fiber up to 6.0mm; up to 10° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>
 <p>CUTOUT 41mm [1.625]</p> <p>7mm [0.276]</p> <p>51mm [2.020]</p> <p>47mm [1.853]</p> <p>10°</p> <p>9mm [0.367]</p>	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 48mm</p> <p>Lens Type: 20mm Domed Glass Lens</p> <p>Beam Angle: 27° - 43°</p> <p>Tilt Angle: up to 10°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-10 Medium) adjustable-focus accent fixture with 20mm domed glass lens and 48mm outer diameter; medium 27° - 43° beam angle (fiber size dependent); accepts PMMA or glass fiber up to 6.0mm; up to 10° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>

Avant-Garde Series - Adjustable Accent Fixtures

Specifications		CAT. NO. AV - MC - 2 - 48 - 20N -
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 48mm</p> <p>Lens Type: 20mm Domed Glass Lens</p> <p>Beam Angle: 8° - 28°</p> <p>Tilt Angle: up to 10°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-10 Focus) adjustable- focus accent fixture with 20mm domed glass lens and 48mm outer diameter; narrow 8° - 28° beam angle (fiber size dependent); accepts PMMA or glass fiber up to 6.0mm; up to 10° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm</p> <p>Ferrule Type: Micro Ferrule</p> <p>Fixture Size: 71mm</p> <p>Lens Type: No Lens</p> <p>Beam Angle: 54°</p> <p>Tilt Angle: up to 35°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-10 Focus) adjustable- focus accent fixture with 20mm domed glass lens and 48mm outer diameter; narrow 8° - 28° beam angle (fiber size dependent); accepts PMMA or glass fiber up to 6.0mm; up to 10° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 71mm</p> <p>Lens Type: 20mm Domed Glass Lens</p> <p>Beam Angle: 27° - 43°</p> <p>Tilt Angle: up to 35°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.1 kg (0.22 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-35 Medium) adjustable-focus accent fixture with 20mm domed glass lens and 71mm outer diameter; medium 27° - 43° beam angle (fiber size dependent); accepts PMMA or glass fiber up to 6.0mm; up to 35° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>

Avant-Garde Series - Adjustable Accent Fixtures

Specifications		CAT. NO. AV - MC - 2 - 71 - 20N -	BL WH BC/GR CH/GR
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 2.0mm, 3.0mm, 4.5mm, 6.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 71mm</p> <p>Lens Type: 20mm Domed Glass Lens</p> <p>Beam Angle: 8° - 28°</p> <p>Tilt Angle: up to 35°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.2 kg (0.44 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 2-35 Focus) adjustable- focus accent fixture with 20mm domed glass lens and 71mm outer diameter; narrow 8°- 28° beam angle (fiber size dependent); accepts PMMA or glass fiber up to 6.0mm; up to 35° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>	
Specifications		CAT. NO. AV - ID - 3 - 71 - NL -	BL WH BC/GR CH/GR
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 8.0mm, 10.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 71mm</p> <p>Lens Type: No Lens</p> <p>Beam Angle: 54°</p> <p>Tilt Angle: up to 25°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.2 kg (0.44 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 3-25 Wide) adjustable- focus accent fixture with no lens and 71mm outer diameter; wide 54° beam angle; for use with 8.0mm through 10.0mm PMMA or glass fiber; up to 25° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>	
Specifications		CAT. NO. AV - ID - 3 - 71 - 26 -	BL WH BC/GR CH/GR
	<p>Fiber Type: PMMA or Glass</p> <p>Fiber Sizes: 3.0mm*, 4.5mm*, 6.0mm* 8.0mm, 10.0mm</p> <p>Ferrule Type: Indoor Ferrule</p> <p>Fixture Size: 71mm</p> <p>Lens Type: 26mm Domed Glass Lens</p> <p>Beam Angle: 6° - 31°</p> <p>Tilt Angle: up to 25°</p> <p>Mounting: Recessed, Screwed</p> <p>Weight: 0.2 kg (0.44 lbs)</p> <p>Primary Material: UV-stable Thermoplastic</p>	<p>Description: Avant-garde Series (Roblon size 3-25 Focus) adjustable- focus accent fixture with 26mm domed glass lens and 71mm outer diameter; narrow 6° - 31° beam angle (fiber size dependent); for use with 3.0mm through 10.0mm PMMA or glass fiber; up to 25° tilt angle and 360° rotation; recessed mounting with screws.</p> <p>Finishes Available: Black (BL), White (WH), Bronzed Copper/Grey (BC/GR), Chrome/Grey (CH/GR)</p>	

*Requires Ferrule Adapter